




RE-KE - TOOL

Hardening deviations on keyways

We have the solution: RE-KE - Tool

The invention relates to a method for reworking grooved internal profiles especially keyways in hardened wheels. In the manufacture of hardened pieces with keyways is always occurring the problem that individual parts of the pieces after hardening process are not dimensionally stable and must be reworked. This reworking is usually made by additional grinding operations. These operations are increasing the production costs considerably. The service life of these tools is relatively short, especially for larger deviations a reworking is often not possible. Of these unsatisfactory methods and tools, Rehfuß has provided a method and tools for finishing grooved inner profiles after hardening process. Hardening deviations can be removed simply, quickly and economically. If you are interested - please contact.

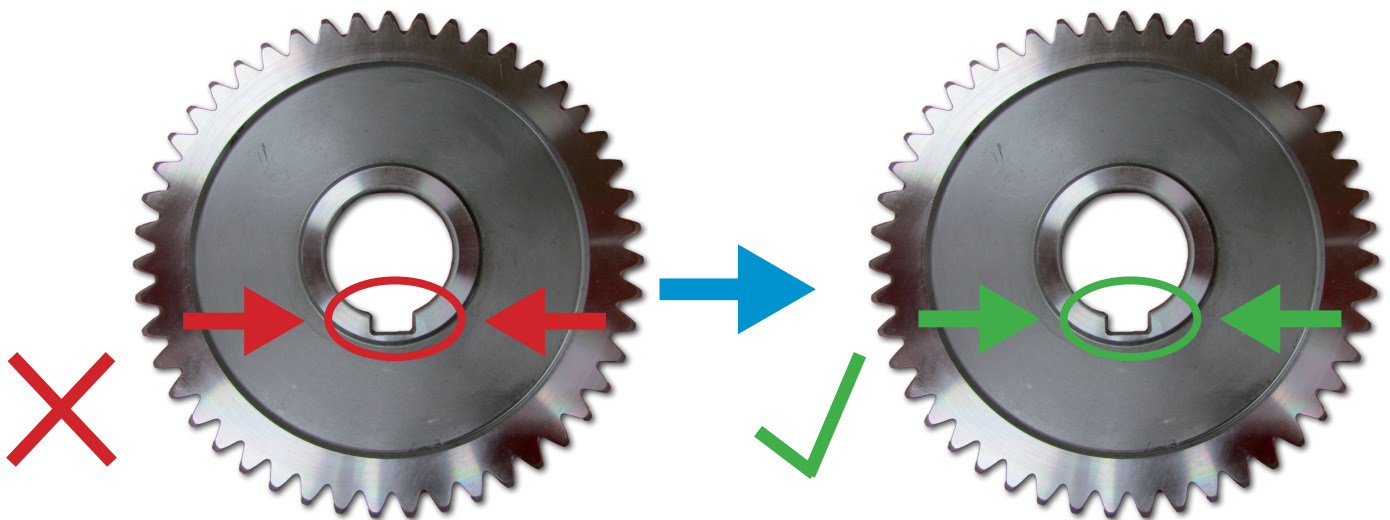

Keyway too tight ?

The use of RE-KE-Tool enables a appropriate and easy rework

**success based on
quality and reliability**

Contact:

Rehfuß Drive Solutions GmbH
Dipl. Ing. (FH) Martin Fink
Phone: +049 7432 7015 – 47
E-mail: martin.fink@rehfuss.com

rehfuss.com